

Cameo

self contained




Electronic controller



Front breathing



Removable refrigeration cassette



LED lighting



10 Amp power


The Australian Made Cameo self-contained have been designed for the testing demands of busy venues to operate efficiently, to maintain temperature as products are taken out, stock replenished and doors continually opened and closed. The units are available in one to four door counters, manufactured in stainless steel or hardwearing black coated steel. Glass door units with LED lighting ensure an attractive display, while adjustable shelves enable different sized bottles and cans to be stored efficiently.



Advantages

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Front breathing ventilation
- Forced air refrigeration system contained in a removable cassette for easy service and maintenance
- Optimised ducted air flow
- Auto defrost utilising waste heat recovery vaporiser
- Two adjustable plastic coated shelves per door
- Anti-corrosive evaporator coil coating
- Heavy duty swivel and brake castors (legs optional)
- On/off switch for internal lights (glass door only)
- Fitted with triple glazed self closing doors with high efficiency long life LED strip lighting
- Optional double glazed heated glass doors
- Choice of optional warm LED lights or dimmable
- Face mounted hinges (plinth mount ready)

General counters + back bars

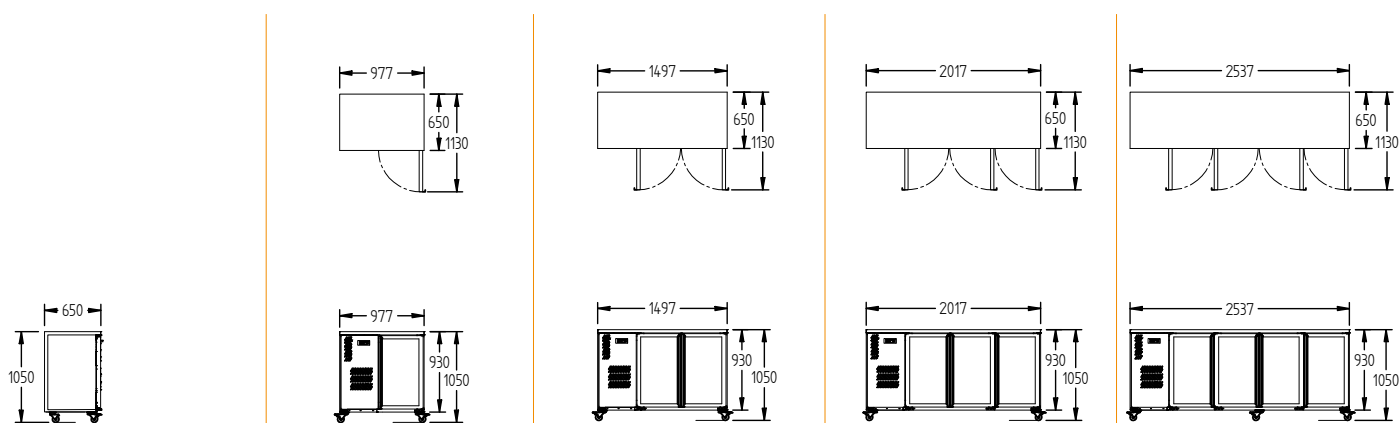

MODEL		1 DOOR	2 DOOR	3 DOOR	4 DOOR
H (Refrigerator +1°/+4°C)	Black, Glass door	HC1UGB	HC2UGB	HC3UGB	HC4UGB
H (Refrigerator +1°/+4°C)	Black, Solid door	HC1USB	HC2USB	HC3USB	HC4USB
H (Refrigerator +1°/+4°C)	Stainless Steel, Glass door	HC1UGS	HC2UGS	HC3UGS	HC4UGS
H (Refrigerator +1°/+4°C)	Stainless Steel, Solid door	HC1USS	HC2USS	HC3USS	HC4USS

SPECIFICATIONS

CAPACITY LITRES	200	420	640	870
DIMENSIONS - W X D X H (ON CASTORS) MM	977 W x 650 D x 1050 H	1497 W x 650 D x 1050 H	2017 W x 650 D x 1050 H	2537 W x 650 D x 1050 H
WEIGHT UNPACKED (KG)	160	180	200	230

STANDARD INCLUSIONS ***

DOOR TYPE	Standard: G (Glass door), S (Solid door)			
FINISH	B (Black) with stainless steel countertop and internal floor or S (Stainless steel) interior and exterior excluding rear and under			
SHELVES/DOOR	2	2	2	2

ELECTRICAL

POWER SUPPLY	10 amp	10 amp	10 amp	10 amp	
FRIDGE MODELS	RUNNING AMPS	3.5	4.1	4.6	5.7

GAS TYPE

REFRIGERANT	FRIDGE MODELS	R134a	R134a	R134a	R134a
-------------	---------------	-------	-------	-------	-------